




250 Ton


Link-Belt ATC 3250

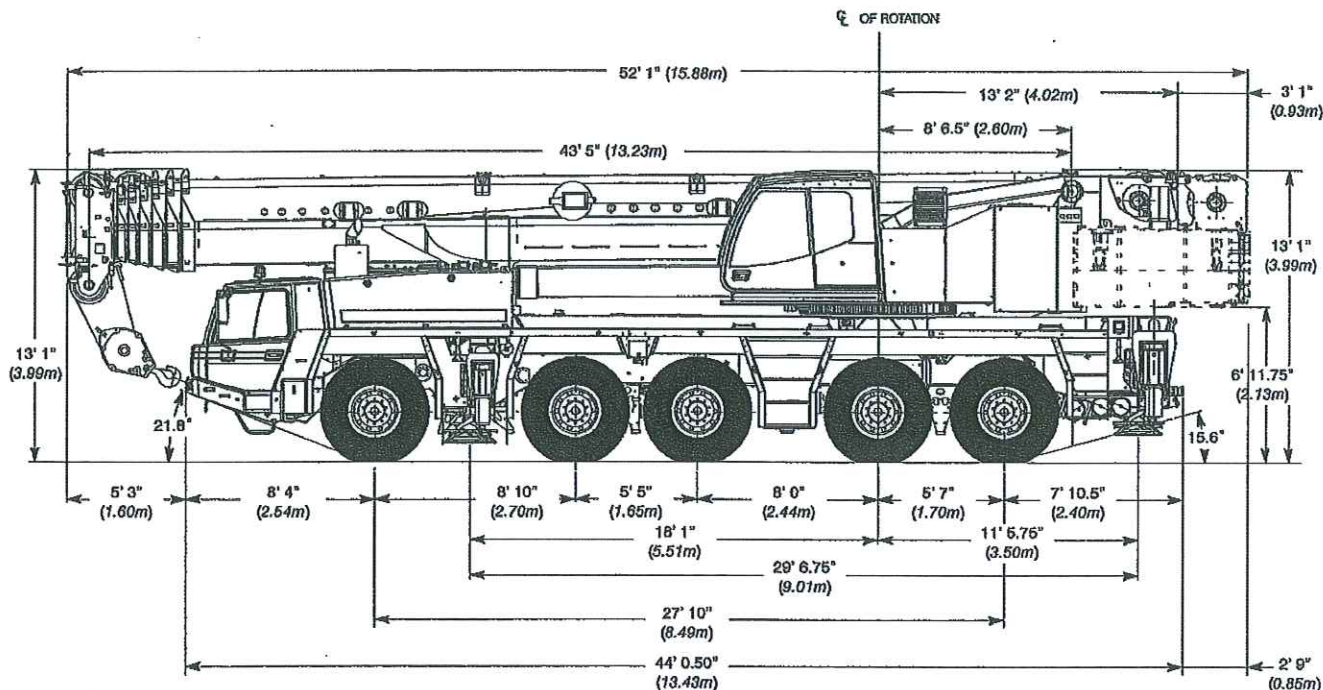


Turning Radius	20.5R25		16.00R25	
	English	Metric	English	Metric
Wall to wall over carrier	36' 0"	11.0m	35' 9"	10.9m
Wall to wall over boom	38' 4"	11.7m	38' 1"	11.6m
Wall to wall over boom attachment	40' 7"	12.4m	40' 4"	12.3m
Curb to curb	32' 2"	9.80m	31' 11"	9.72m
Centerline of tire	31' 5"	9.6m	31' 2"	9.5m

Tail Swing	English	Metric
With auxiliary winch	16' 8"	5.1m
Without auxiliary winch	14' 5"	4.4m

Overall Width	English	Metric
With 51,808-103,616 lb (23 500-37 000kg) counterweight	15' 1"	4.6m
With 166,527 lb (71 000kg) counterweight	18' 5"	5.6m

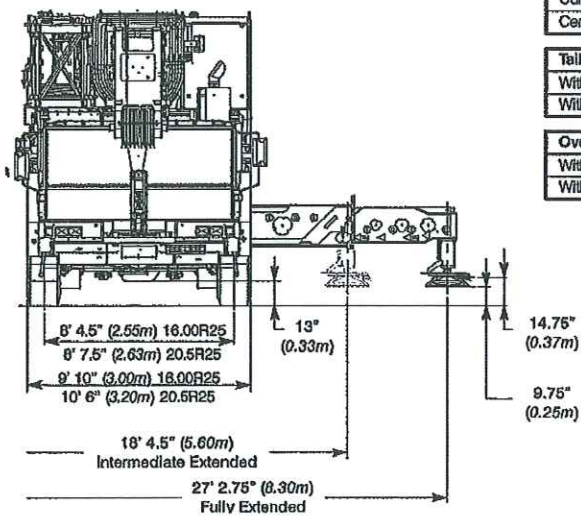


Working Range Diagram

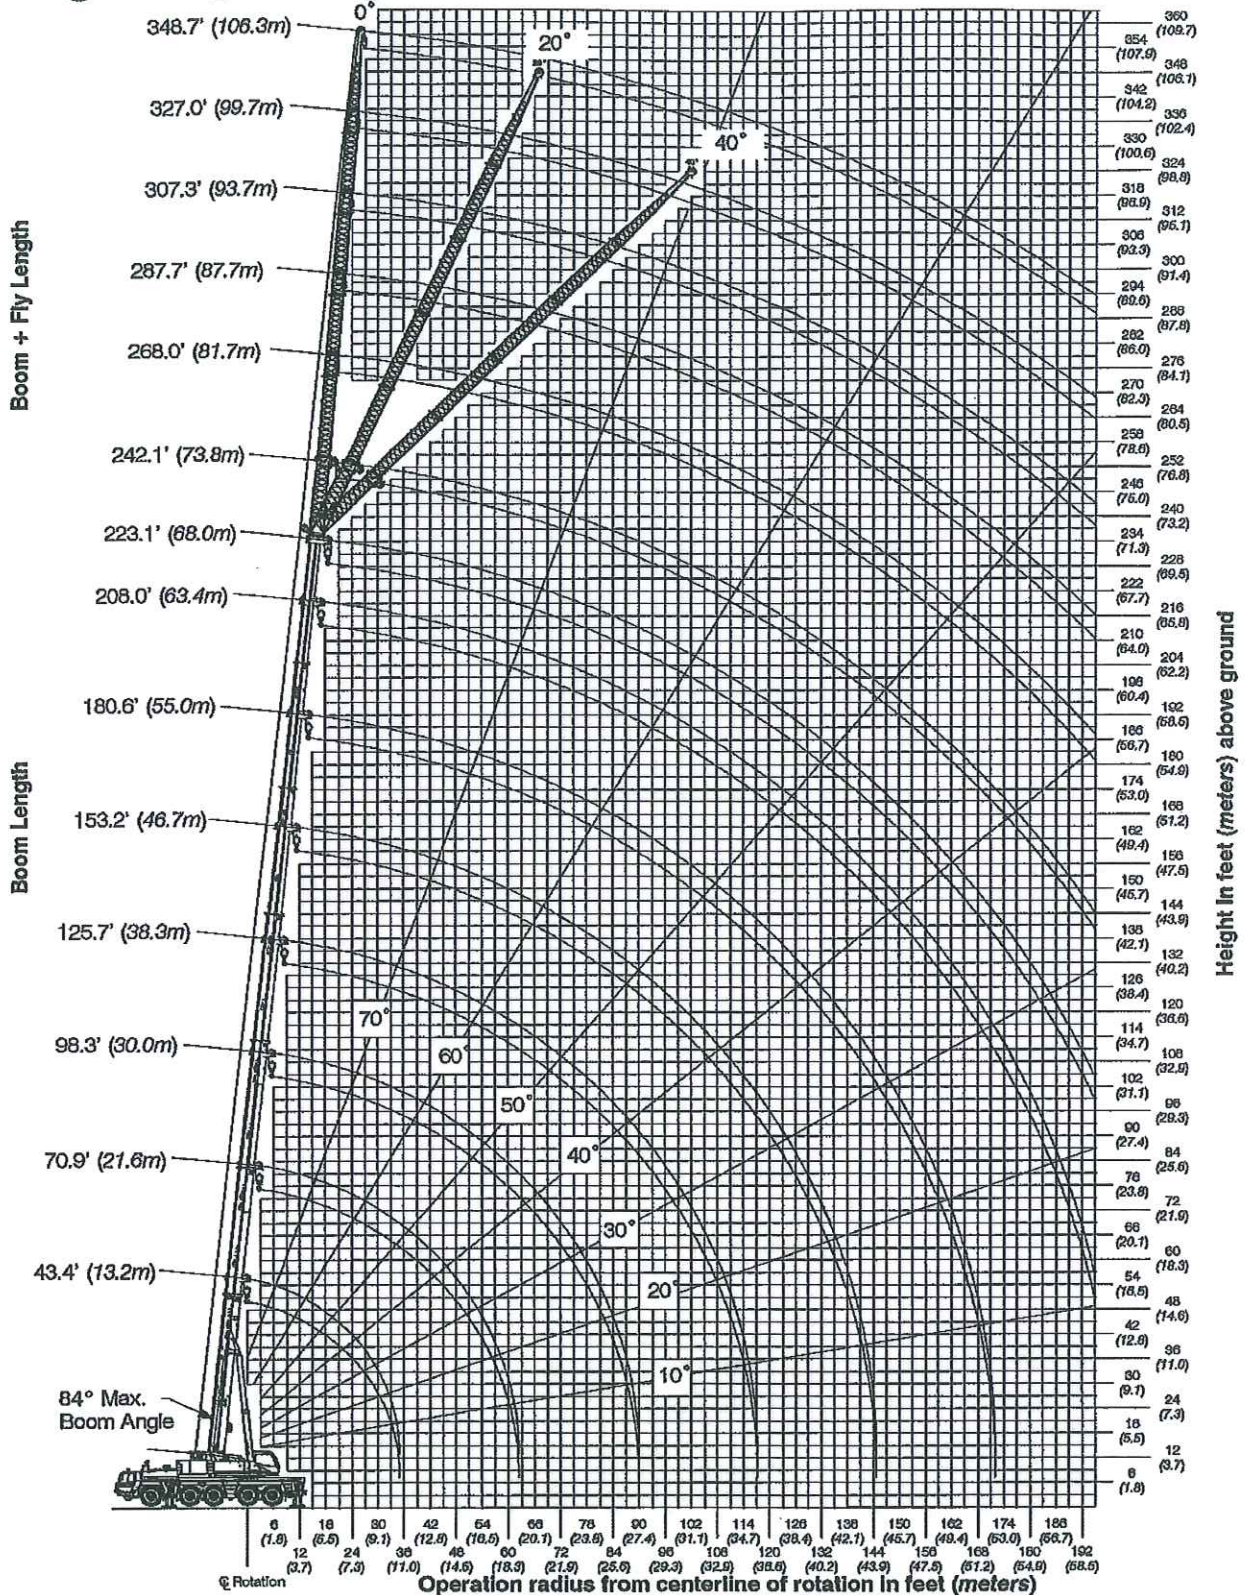



(All capacities are listed in pounds)

[illegible]

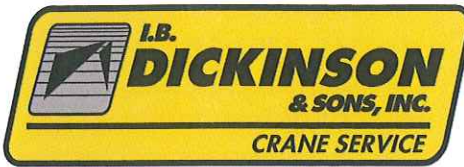

250 Ton

156,257 lb Counterweight - Fully Extended Outriggers - 360 Degree Rotation

(All capacities are listed in pounds)

223' Main Boom															
Radius (ft)			0 Degree Offset				20 Degree Offset				40 Degree Offset				Radius (ft)
			17	43			17	43			17	43			
50			20,300	13,000											50
55			20,000	13,000			19,100								55
60			19,500	13,000			18,400				17,700				60
65			18,800	13,000			17,700	13,000			17,100				65
70			18,200	13,000			17,200	13,000			16,500				70
75			17,600	13,000			16,700	12,900			16,000				75
80			17,100	13,000			16,200	12,700			15,600	11,800			80
85			16,600	13,000			15,700	12,400			15,200	11,500			85
90			16,100	13,000			15,300	12,000			14,900	11,100			90
95			15,600	12,800			14,900	11,700			14,600	10,900			95
100			15,100	12,500			14,400	11,400			14,200	10,700			100
110			14,200	11,800			13,800	10,700			13,600	10,200			110
120			13,500	11,300			13,100	10,200			12,900	9,800			120
130			12,900	10,700			12,400	9,700			12,200	9,300			130
140			12,300	10,100			11,900	9,400			11,700	9,000			140
150			11,800	9,700			11,500	9,100			11,300	8,600			150
160			11,300	9,400			11,100	8,700			10,900	8,300			160
170			10,400	8,800			10,400	8,400			10,400	8,200			170
180			9,700	8,500			9,700	8,100			9,700	7,800			180
190			9,100	8,200			9,100	7,800			9,100	7,600			190
200			8,200	7,700			8,200	7,600				7,400			200
210			7,100	7,100			7,100	7,300				7,300			210
220			5,900	6,500				6,800							220
230				5,800				6,000							230
240				5,000				5,200							240
250				4,100				4,400							250