

ATF 220G-5


250 US t / 220 t MAX. CAPACITY

TIER 4f

ALL TERRAIN CRANE





Vehicle dimensions · Dimensions du véhicule · Dimensiones del vehículo

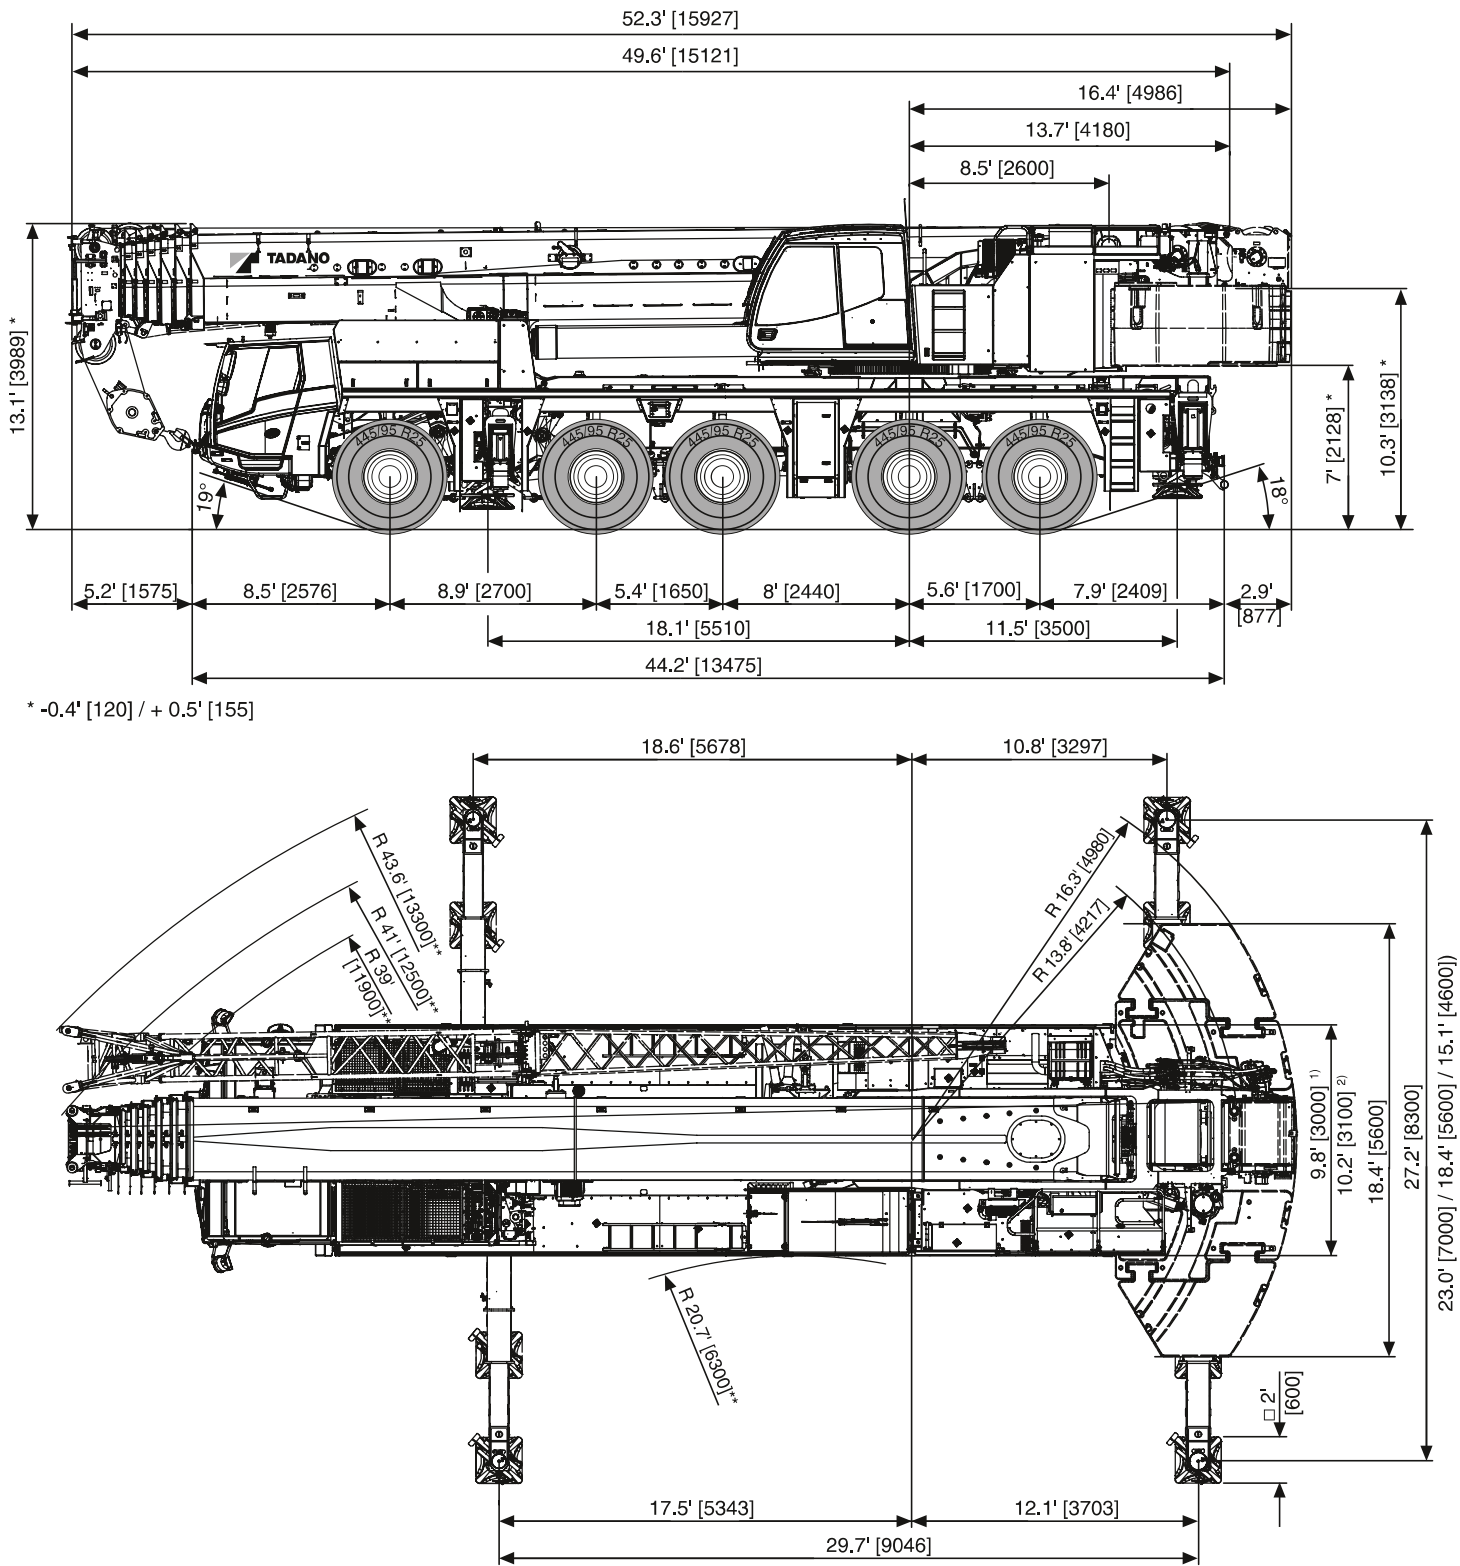

** Minimum turning radius • Rayon de braquage mini • Radio de viraje mínimo



¹⁾ 445/95 R 25 (16.00 R 25)
²⁾ 525/80 R 25 (20.5 R 25)

Working range · Rayon de travail · Zona de trabajo




156,528 lbs



ASME



71 t

ASME

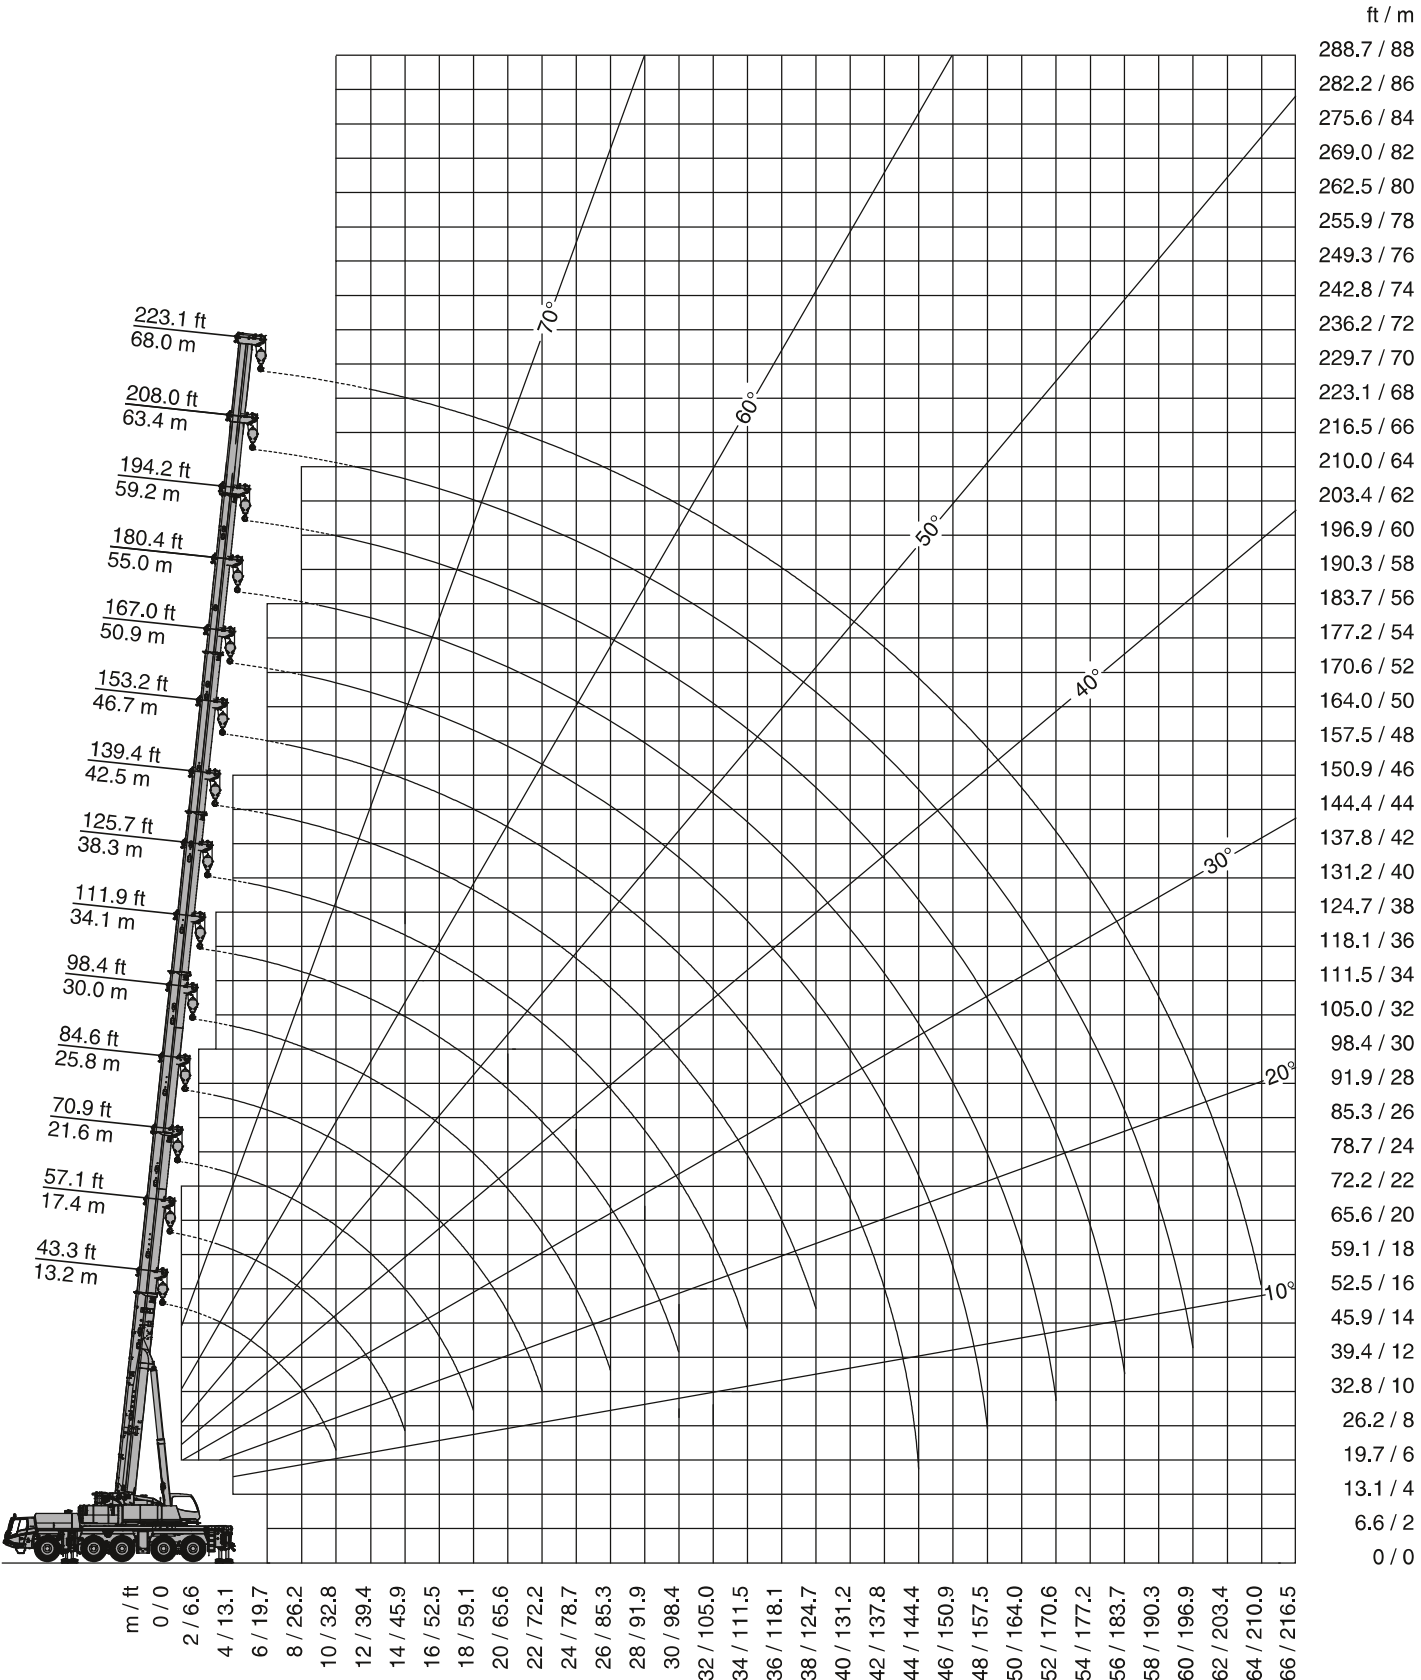



156,528 lbs

ASME


lbs x 1,000

 ft	43.3 ft*	43.3 ft	57.1 ft	70.9 ft	84.6 ft	98.4 ft	111.9 ft	125.7 ft	139.4 ft	153.2 ft	167.0 ft	180.4 ft	194.2 ft	208.0 ft	223.1 ft
8.2	485.0**														
9.8	396.8**	389.1**	308.6**	308.6**	252.2										
11.5	373.7**	352.7**	308.6**	308.6**	252.2	199.5									
13.1	352.7**	331.8**	308.6**	308.6**	244.9	199.5									
14.8	331.8**	304.2**	304.7**	301.8**	231.0	199.5	154.3								
16.4	298.7**	280.0	281.1	277.8	227.1	195.1	154.3	120.2							
19.7	248.0	240.3	241.8	238.5	227.1	175.9	154.3	120.2	95.9						
23.0	212.3	210.5	211.2	210.8	209.2	170.9	147.0	120.2	95.9	76.1					
26.2	184.3	184.3	185.2	186.1	183.2	170.9	134.9	120.2	95.9	76.1	62.8				
29.5	162.0	162.0	162.7	163.6	160.9	162.5	127.9	116.4	95.9	76.1	62.8	50.7			
32.8	144.2	144.2	146.2	145.5	145.9	144.4	127.9	108.0	94.1	76.1	62.8	50.7	41.4		
36.1			131.4	131.6	132.1	129.4	127.2	100.8	89.3	76.1	62.8	50.7	41.4	33.1	
39.4			119.0	120.4	119.5	117.1	119.0	95.7	86.6	74.1	62.8	50.7	41.4	33.1	30.4
45.9			99.6	101.0	100.1	101.0	99.6	89.3	79.4	69.4	61.1	50.7	41.4	33.1	30.4
52.5				86.4	87.3	86.4	85.1	83.8	71.7	64.4	56.2	50.3	41.4	33.1	30.4
59.1				75.2	75.8	75.0	73.6	75.2	64.8	59.1	52.0	46.7	41.2	33.1	30.4
65.6					66.8	65.9	67.5	66.1	59.1	54.7	48.3	44.1	38.4	33.1	30.4
72.2					59.1	59.1	59.7	58.0	54.2	50.5	45.0	41.2	36.4	32.8	30.4
78.7						53.6	52.5	50.7	49.2	46.7	42.1	38.6	34.2	30.9	29.1
85.3						47.6	46.5	44.8	43.2	42.8	39.2	36.2	32.4	29.3	27.3
91.9							41.4	39.7	38.1	39.7	37.0	34.2	30.6	27.8	25.4
98.4							37.3	35.5	35.9	35.5	33.7	32.2	28.9	26.2	23.6
105.0								32.4	33.3	31.7	30.2	30.4	27.6	24.9	22.3
111.5								31.3	30.2	28.7	28.0	28.2	26.2	23.8	20.7
118.1									27.3	25.8	26.7	26.2	25.1	22.5	19.6
124.7									24.9	24.5	24.3	23.8	24.0	21.6	18.3
131.2										23.6	22.0	21.6	22.0	20.5	17.4
137.8										21.8	20.1	20.1	20.1	19.6	16.3
144.4										17.9	18.7	19.2	18.3	18.3	15.4
150.9											17.9	17.6	17.2	16.8	14.6
157.5											17.2	16.3	16.3	15.2	13.7
164.0												15.0	15.0	13.9	13.0
170.6												14.1	13.9	12.6	12.1
177.2													12.8	11.5	11.5
183.7													11.7	10.6	10.4
190.3														9.7	9.5
196.9														8.8	8.6
203.4															7.7
210.0															7.1


* Over rear · A l'arrière · Hacia atrás

** With additional lifting equipment · Avec équipement de levage supplémentaire · Con equipamiento de elevación adicional


Working range · Rayon de travail · Zona de trabajo



43.3 – 223.1 ft



0.7 + 4.6 ft




27.2 ft




360°

156,528 lbs


ASME



13.2 – 68 m



0.2 + 1.4 m



8.3 m



360°

71 t

ASME

